

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073971 A2

(51) International Patent Classification⁷: **G11B 27/00**

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:
PCT/IB2005/050348

(22) International Filing Date: 27 January 2005 (27.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04100345.0 30 January 2004 (30.01.2004) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NIJBOER, Jakob, G.** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **IJTSMA, Pope** [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agents: **UITTENBOGAARD, Frank et al.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: QUICK ACCESS TO DISC MANAGEMENT INFORMATION

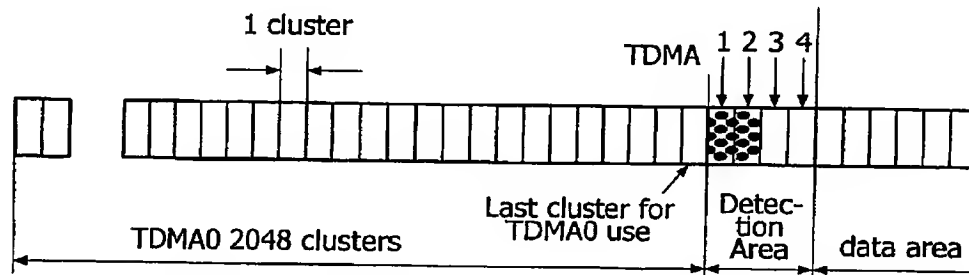

(57) Abstract: The invention relates to a method and a recording device for easy and quick access to record carrier management information stored on the record carrier itself. The invention further relates to a record carrier for use in such a method and recording device.

Quick access to disc management information

The current invention relates to a method and a recording device for recording information on a record carrier, especially a disc shaped record carrier of the write-once type, said record carrier comprising at least one area for storing disc management information. The current invention further relates to a record carrier, especially a disc shaped record carrier of the write-once type, comprising at least one area for storing disc management information.

Optical recording systems, such as for example Blu-ray Disc, keep track of all sorts of disc management information during recording. Examples of such disc management information that needs to be tracked are the track and session structures of a disc, the location of defective area's on a disc, and the location of recorded and unrecorded areas on a disc. Generally, this disc management information needs to be updated many times during use of a disc. This is especially so in the case of random recording.

For the purpose of storing and updating this disc management information, a special area is generally available on the disc itself. Such a special area is generally located in the Lead-in and/or the Lead-out zone of a disc. This special area may comprise, for example, a Defect List for storing the location of defective areas on a disc (and their replacement area's), and a Space Bit Map for storing the location of recorded and unrecorded areas, such as for example clusters, on a disc. Furthermore, tracks and sessions boundaries may be registered in this special area. In this application such a special area will be referred to as a Temporary Disc Management Area (TDMA).

For a single layer disc (that is, a disc comprising a single information layer for storing the information to be recorded) this TDMA area is generally located in the Lead-in zone, and is referred to as TDMA0. For a dual layer disc (that is a disc comprising two information layers, referred to as layer L0 and layer L1) there is generally the same TDMA0 area located in the Lead-in zone of layer L0, and additionally a second TDMA area, referred to as TDMA1, in the Lead-out zone of layer L1. In the Blu-ray Disc format specification both the TDMA0 and the TDMA1 are specified to have a fixed size of 2048 physical clusters.

Especially for write-once discs, additional TDMA's may be defined to facilitate more storage space for storing the disc management information. These additional

areas may be useful when many updates are required, for example in the case of many ejects (possibly after short recordings), or when a more frequent update scheme is desired for more robustness, for example against power failures. In write-once discs the TDMA's cannot be overwritten (in contrast to rewritable discs), and therefore the additional storage space may be required. For example, a single layer write once disc may have, next to its TDMA0, at least one additional TDMA area (TDMA1 in figure 1), while a dual layer write once disc may have, next to its TDMA0 and TDMA1, at least one additional TDMA area on layer L0 and at least one on layer L1. In figure 2 these additional TDMA areas are called TDMA2, TDMA3, and TDMA4.

Generally, the TDMA areas are allocated when a disc is initialised, at which time at least one TDMA area (TDMA0) is allocated for a single layer disc, and at least two TDMA areas (TDMA0 and TDMA1) are allocated for a dual layer disc. Generally, the TDMA areas are used sequentially and in the following order:
single layer disc: TDMA0 → TDMA1 ;
dual layer disc: TDMA0 → TDMA1 → TDMA2 → TDMA3 → TDMA4 .
Each TDMA area is generally filled up contiguously.

In a Blu-ray Disc optical recording system the disc management information stored in a TDMA area on a disc is only updated for that parts that has changed. For example, when the Space Bit Map (SBM) of layer L0 (SBM0) has changed and the Space Bit Map of layer L1 (SBM1) has not changed, only the updated Space Bit Map of layer L0 is written into the TDMA. A Temporary Disc Definition Sector (TDDS) contains pointers to the most recent version of the various structures in a TDMA (see figure 3). Now, a drive can find the most recent status by accessing the TDDS on a disc, reading the pointers, and subsequently accessing the relevant, and up-to-date, structures, like the SBM0 and the SBM1 shown in figure 3. For this reason the last written cluster of a TDMA contains an up-to-date TDDS in a specific location (Data Frame 31 in cluster Z shown in figure 3) containing up-to-date pointers to the various structures.

When a disc is inserted into a drive, the drive needs to find the TDMA that is in use as fast as possible. However, this can take some time. For example when the first n TDMA areas on a disc are already filled up and TDMA($n+1$) is the TDMA area in use, the drive has to scan all the previous n TDMA areas before arriving at TDMA($n+1$). Moreover, this scanning of a sequence of TDMA areas may take a very long time when parts of the

sequence of TDMA areas is damaged, and the drive performs several retries before continuing to the next cluster.

5 It is an object of the present invention to reduce this start-up time, especially when parts of the TDMA areas are damaged. This object is achieved by providing a method and a recording device as described below, and by providing a record carrier for use in the method and recording device according to the present invention.

10 Both, a single layer disc and a dual layer disc comprise at least one TDMA area, that is the first TDMA area TDMA0. According to a first aspect of the present invention this first TDMA area, TDMA0, comprises signals indicating whether or not the first TDMA area itself and subsequent TDMA areas (in a sequence of TDMA areas) are in use. According to a second aspect of the present invention this first TDMA area, TDMA0, is followed by an area (referred to as Detection Area) which comprises signals indicating whether or not the
15 first TDMA area and subsequent TDMA areas (in a sequence of TDMA areas) are in use. By retrieving information from these signals, a drive can jump directly to the last used TDMA area holding the most up-to-date disc management information. Now only information from the first TDMA area (that is, TDMA0) or the Detection Area needs to be retrieved, while all TDMA areas between this first TDMA area and the TDMA area holding the most up-to-date
20 disc management information can be skipped.

In a preferred embodiment the signals are in the form of the presence or absence of a high frequency (HF) mark. The indication used is the presence of a high frequency (HF) for a corresponding TDMA area in use on the disc. Now, the data content of the first TDMA area itself is not relevant for the detection.

25

The features and advantages of the present invention will be apparent from the following more particular description of embodiments of the invention as illustrated in the accompanying drawings, where

30 Fig. 1 shows an example of the locations of TDMA areas on a single layer disc,

Fig. 2 shows an example of the locations of TDMA areas on a dual layer disc,
Fig. 3 shows an example of information clusters written in the TDMA
showing a TDDS in the last cluster, and

Fig. 4 shows an example of a detection area with up to TDMA2 in use.

Figure 1 shows by way of example a single layer write once disc. This disc has, next to its TDMA0, an additional TDMA1 area located at the outer side of the Outer Spare Area 0 (OSA0). Figure 2 shows by way of example a dual layer write once disc having, next to its TDMA0 and TDMA1, one additional TDMA area on layer L0 and two additional TDMA areas on layer L1. These additional TDMA areas are called TDMA2, TDMA3, and TDMA4, and are located in the Outer Spare Areas OSA0 and OSA1 and in the Inner Spare Area ISA1, respectively.

In these single layer and dual layer discs at least one TDMA area is available, that is TDMA0. In an embodiment of the invention a predefined number of clusters of the at least one TDMA area (TDMA0) is reserved to indicate a filled TDMA. This predefined number corresponds to the number of TDMA areas. In an alternative embodiment the at least one TDMA area (TDMA0) is followed by a Detection Area consisting of a predefined number of clusters reserved to indicate a filled TDMA (see figure 4).

Figure 4 shows part of an information layer L0 of a dual layer disc (as is shown in figure 2) where a TDMA0 consisting of 1048 clusters is followed by a Detection Area consisting of 4 clusters. The indication used is the presence of a high frequency (HF) indicator for each cluster representing one of the four subsequent TDMA areas (TDMA1 to TDMA4 in figure 2). The presence of a high frequency (HF) in a cluster in the Detection area indicates that the corresponding TDMA area (1,2,3 or 4) on the disc is in use. The data content of the clusters in the Detection Area itself is not relevant for the detection. In the example shown in figure 4, TDMA2 is the TDMA area currently being used by the drive for TDMA updates, while TDMA0 and TDMA1 are full or cannot be used anymore for some other reason.

The presence of a high frequency (HF) in a cluster may be obtained by writing a pattern of marks in that cluster. The pattern of marks may, for example, represent random information since the information content of a cluster is not relevant for the detection. Now cluster having marks written in it have a high frequency (HF) signal present, while clusters having no marks written in it have no high frequency (HF) signal present

When none of the four clusters in the Detection Area are written, that is none of them have a high frequency (HF) indicator, then the TDMA0 is being used. In an alternative embodiment, an additional cluster is added for indicating whether or not the TDMA0 area is being used. In the example above related to the dual layer disc shown in

figure 2, the Detection Area would consist of five clusters, related to the TDMA areas (0,1,2,3 or 4).

A drive according to the invention can quickly detect the TDMA area in use by jumping to the Detection Area, checking the presence or absence of the high frequency (HF) indicators, and subsequently scanning only the indicated TDMA. In an embodiment only the last written cluster in that TDMA area has to be read to be able to access all disc management information, because this last written cluster contains the Temporary Disc Definition Sector (TDDS).

In a further embodiment the drive can jump directly to the Detection Area because this Detection Area has a fixed address on the disc.

It is noted that the embodiment in which a high frequency (HF) indication is used results in a very robust detection mechanism. This because there is no need to read the correct data content; only the absence of presence of a high frequency (HF) is relevant. This embodiment easily survives scratches, dirt, and other damages to the media. This is especially so when a cluster requires about half a revolution (on the inner diameter) of the disc, which is rarely damaged completely.

It is further noted that the invention is not limited to single layer and dual layer discs only, but that it likewise can be used advantageously in disc comparing any number of information layers for storing the information to be recorded.

CLAIMS:

1. Record carrier comprising at least one area for storing disc management information, said record carrier further comprising and area comprising signals indicating whether or not the areas for storing disc management information are in use, each one of said signals related to one of said areas for storing disc management information.
5
2. Record carrier according to claim 1, wherein the area comprising signals indicating whether or not the areas for storing disc management information are in use is located inside a first one of said at least one area for storing disc management information.
- 10 3. Record carrier according to claim 1, wherein the area comprising signals indicating whether or not the areas for storing disc management information are in use is located adjacent to a first one of said at least one area for storing disc management information.
- 15 4. Record carrier according to anyone of the preceding claims wherein the signals indicating whether or not the areas for storing disc management information are in use are clusters on a record carrier, said clusters comprising marks for indicating a first status of said areas for storing disc management information and comprising no marks for indicating a second status of said areas for storing disc management information.
20
5. Record carrier according to claim 4, wherein the first status indicates that the areas for storing disc management information are in use, and the second status indicates that the areas for storing disc management information are not in use.
- 25 6. Method for recoding information on a record carrier, said record carrier comprising at least one area for storing disc management information, said record carrier further comprising and area comprising signals indicating whether or not the areas for storing disc management information are in use, each one of said signals related to one of said areas for storing disc management information,

the method comprising the steps
of accessing the area comprising signals indicating whether or not the areas for storing disc
management information are in use,
of determining from said signals the last area for storing disc management information in use,
5 and
of retrieving the disc management information.

7. Method according to claim 6, wherein the step of accessing the area
comprising signals indicating whether or not the areas for storing disc management
10 information are in use consist of jumping to a predefined location on the record carrier.

8. Method according to claim 6, wherein the step of retrieving the disc
management information comprises retrieving pointer information from a predefined location
in the last area for storing disc management information in use, and subsequently retrieving
15 the disc management information by using said pointer information.

9. Recording device for recoding information on a record carrier, said record
carrier comprising at least one area for storing disc management information, said record
carrier further comprising an area comprising signals indicating whether or not the areas for
20 storing disc management information are in use, each one of said signals related to one of
said areas for storing disc management information,
said recording device adapted for performing a method according to claims 6, 7, or 8.

1/3

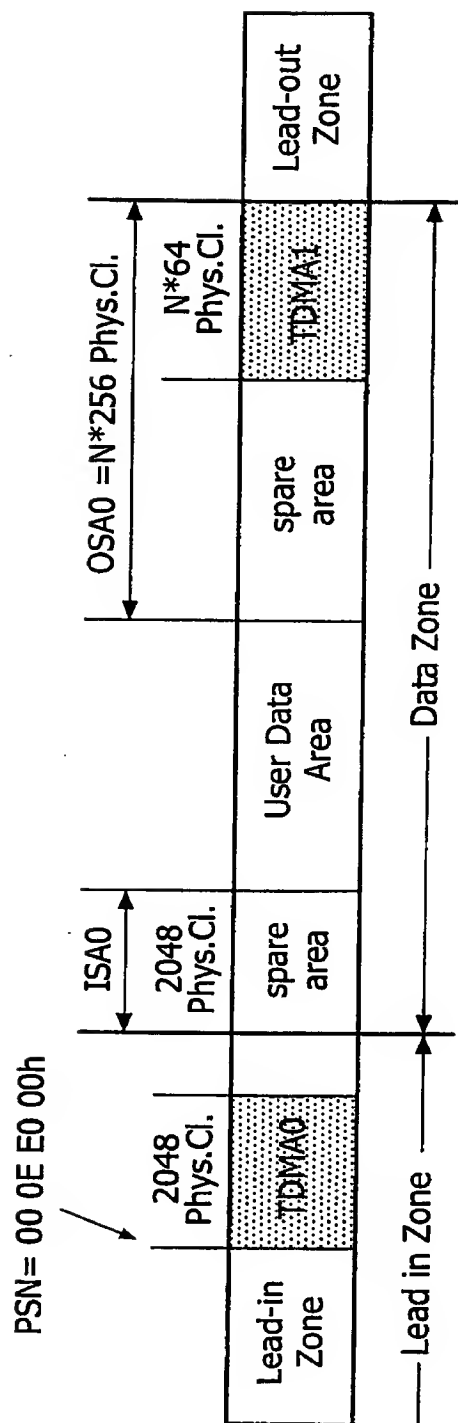


FIG. 1

2/3

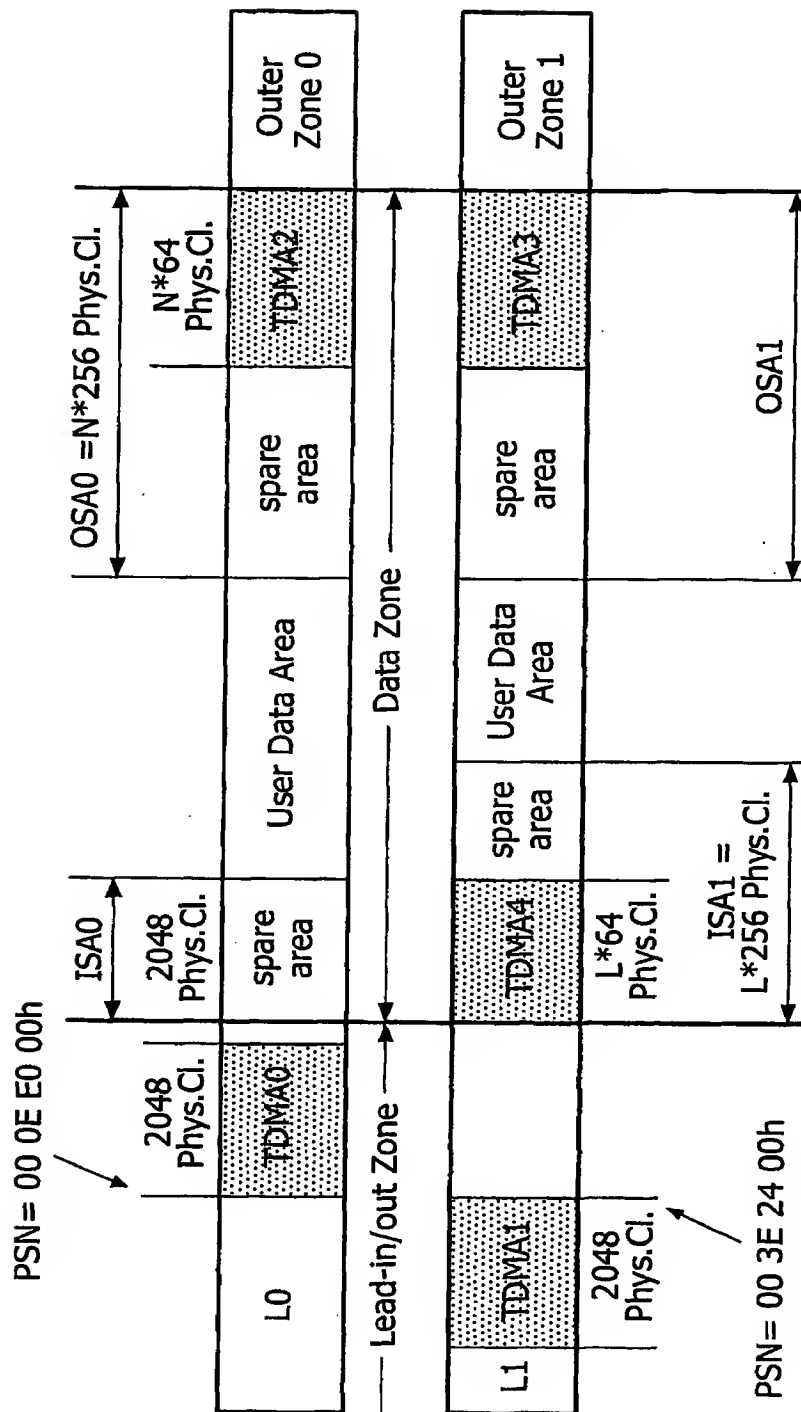


FIG. 2

3/3

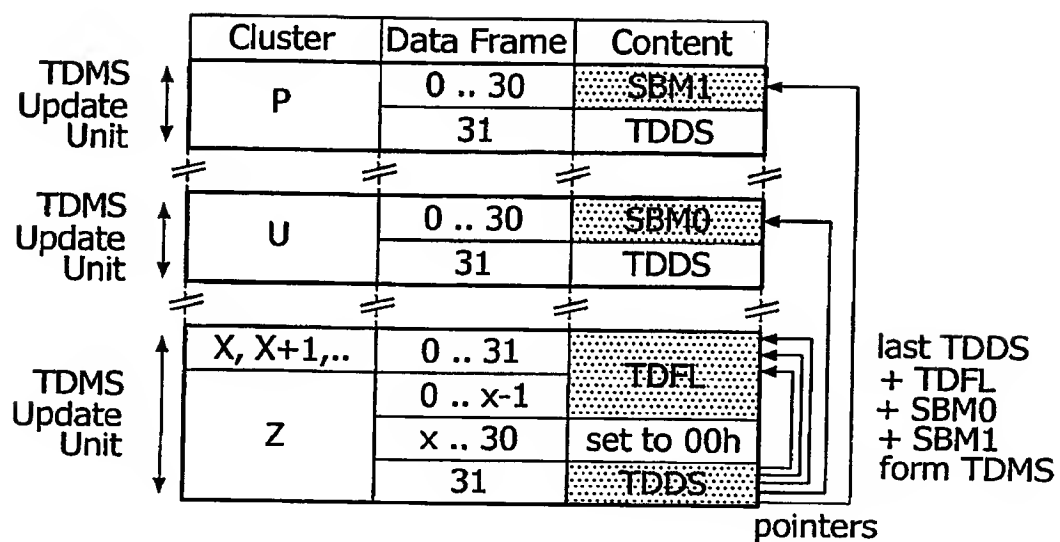


FIG. 3

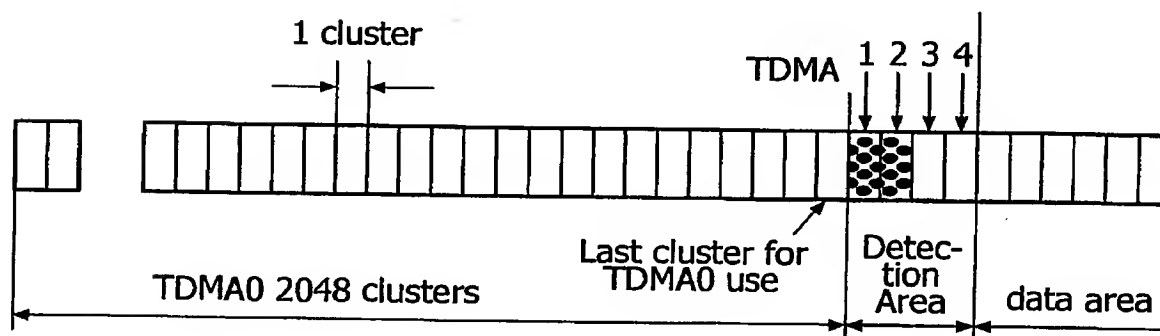


FIG. 4

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number
WO 2005/073971 A3

(51) International Patent Classification⁷: G11B 27/32, 20/12, 20/18

(21) International Application Number:
PCT/IB2005/050348

(22) International Filing Date: 27 January 2005 (27.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04100345.0 30 January 2004 (30.01.2004) EP

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): NIJBOER, Jakob, G. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). IJTSMA, Pope [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agents: UITTENBOGAARD, Frank et al.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)


Published:

— with international search report

(88) Date of publication of the international search report:
2 March 2006

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: QUICK ACCESS TO DISC MANAGEMENT INFORMATION

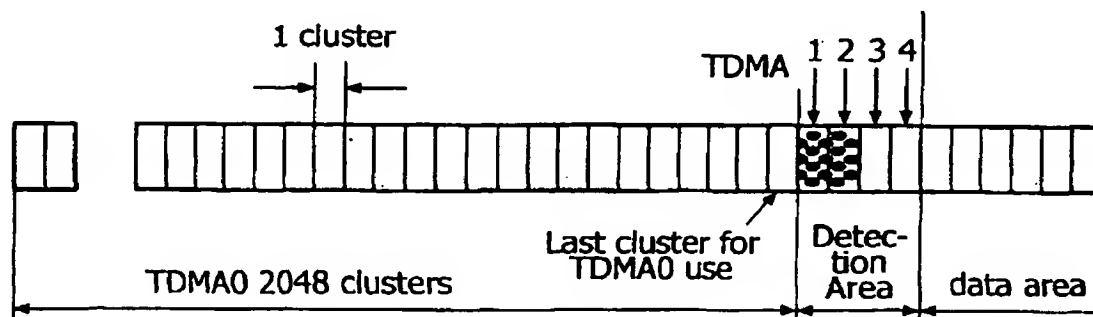

(57) Abstract: The invention relates to a method and a recording device for easy and quick access to record carrier management information stored on the record carrier itself. The invention further relates to a record carrier for use in such a method and recording device.

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/IB2005/050348

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B27/32 G11B20/12 G11B20/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	US 2005/030849 A1 (PARK YONG CHEOL) 10 February 2005 (2005-02-10) abstract paragraphs '0002! - '0011! paragraphs '0040! - '0070! paragraphs '0080!, '0081! paragraphs '0112! - '0120! figures 2-4,7-9,15	1-9
E	WO 2005/015558 A (PIONEER CORPORATION; YOSHIDA, MASAYOSHI; KODA, TAKESHI; KATATA, KEIJI) 17 February 2005 (2005-02-17) abstract	1,6,9
P,A	WO 2004/090890 A (KONINKLIJKE PHILIPS ELECTRONICS N.V.; NIJBOER, JAKOB, G; IJTSM, POPE) 21 October 2004 (2004-10-21) the whole document	1,6,9
-/--		

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 September 2005

Date of mailing of the international search report

11/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Sucher, R

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB2003/050348

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	<p>WO 2004/029941 A (LG ELECTRONICS INC) 8 April 2004 (2004-04-08) the whole document</p> <p>-----</p>	1, 6, 9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Publication No

PCT/IB2005/050348

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005030849 A1	10-02-2005	WO 2005013265 A1	10-02-2005
WO 2005015558 A	17-02-2005	NONE	
WO 2004090890 A	21-10-2004	NONE	
WO 2004029941 A	08-04-2004	AU 2003265100 A1	19-04-2004
		BR 0306601 A	07-12-2004
		CA 2478661 A1	08-04-2004
		EP 1547065 A1	29-06-2005
		US 2004090888 A1	13-05-2004